


**SPECTRUM HOSE LTD**

*Handling the Pressure....*

# Reinforced Polyurethane Hose

Excellent resistance to petroleum based products. Chemical, corrosion and abrasion resistance. Good resistance to UV. Very flexible, even at low temperatures. Good bend radii.

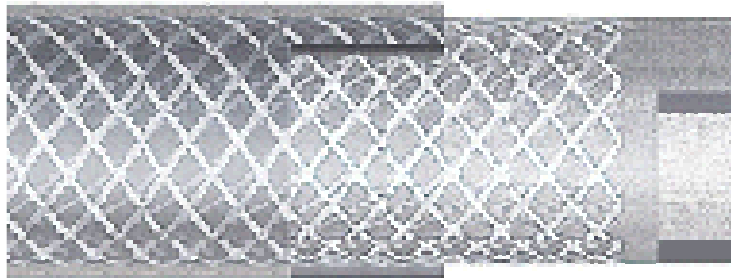

**Construction:** Two layers of 100% ether polyurethane reinforced with 1000 Denier high tenacity polyester yarn.

**Temperatures:** -30 °C to +70 °C. Occasional use up to 100 °C . Brittle point: -70 °C.

**Pressure Rating** At 20 °C. 3:1 safety factor.

**Toxicity:** Silicone & Cadmium Free. Plasticiser Free

Part Number	Bore (mm)	O.D. (mm)	Maximum Working Pressure (Psi)	Weight Kg/m	Minimum Bend Radius (mm)
IH-PUR-06-11	6.5	11.5	290	0.08	22
IH-PUR-10-16	10	16	260	0.3	37
IH-PUR-12-18	12.5	18.5	170	0.18	49
IH-PUR-16-23	16	23	200	0.24	65
IH-PUR-19-26	19	26	170	0.27	84
IH-PUR-25-33	25	33	135	0.40	118