


SPECTRUM HOSE LTD

Handling the Pressure....

Vulcano PU Z

For suction and discharge of abrasive powders, fumes, shavings and vapours.
 Very light and flexible. It gives a high resistance to abrasion due to the characteristics of polyurethane (5 times superior to normal PVC).
 Weather resistant, suitable for most chemicals.
 Suction of dry foods according to EU Directives.

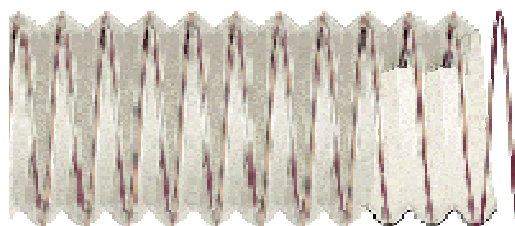

Construction: Ester Based Polyurethane hose reinforced with a zined steel spiral.
 -40° C + 90° C, -40° F ÷ + 194° F.

Temperature: 51 to 203 shown below, sizes up to 400mm available.

Sizes:

part number	inside Ø		weight	min wall thickness	bending radius	vacuum	roll length
	mm	inch					
IHVULPUZ051	51	2	230	0.35	26	0.40	10
IHVULPUZ060	60		270	0.35	30	0.40	10
IHVULPUZ063	63	2-1/2	285	0.35	32	0.40	10
IHVULPUZ065	65		295	0.35	33	0.40	10
IHVULPUZ070	70		360	0.35	35	0.40	10
IHVULPUZ076	76	3	390	0.35	38	0.40	10
IHVULPUZ080	80		410	0.35	40	0.40	10
IHVULPUZ090	90		450	0.35	45	0.40	10
IHVULPUZ100	100		510	0.40	50	0.30	10
IHVULPUZ102	102	4	520	0.40	51	0.30	10
IHVULPUZ110	110		560	0.40	55	0.30	10
IHVULPUZ120	120		610	0.40	60	0.25	10
IHVULPUZ127	127	5	640	0.40	64	0.25	10
IHVULPUZ130	130		660	0.40	65	0.20	10
IHVULPUZ140	140		710	0.40	70	0.20	10
IHVULPUZ150	150		760	0.40	75	0.20	10
IHVULPUZ152	152	6	770	0.40	76	0.20	10
IHVULPUZ160	160		880	0.45	80	0.15	10
IHVULPUZ180	180		990	0.45	90	0.15	10
IHVULPUZ200	200		1100	0.45	100	0.10	10
IHVULPUZ203	203	8	1120	0.45	102	0.10	10